



ALPINE SANITATION & SUPPLIES LTD.
24 Ronson Drive, Unit 16, Etobicoke, Ontario M9W 1B4
Bus: (416)-744-2120 Fax: (416)-249-1859 Toll Free: 1-800 465-6198

L-1X16

Chemical Sanitizing
Undercounter
Dishwasher



FEATURES:

- 30 racks / 120 covers per hour.
- Economical to operate. Uses only 1.7 gallons of water per cycle.
- All heavy duty 304 stainless steel construction assures long life and years of trouble free operation.
- 16" high door opening allows the washing of larger items.
- Unique spray arm system features upper and lower stainless steel wash arms with reinforced end caps.
- Built-in chemical pumps and delimiting system assures proper chemical usage.
- Convenient to service "Works-in-a-drawer". All electrical components are attached to a sliding drawer for easy access and service.
- Pumped drain allows for flexible installation. Requires no floor drain.
- Pump purging system improves results by eliminating soil and chemical carryover during rinse cycle.



Optional dishtable, faucet and pre-rinse unit sold separately.



Pumped drain will drain uphill. Requires no floor drain.



Upper and lower rotating wash arms guarantee excellent results.




Convenient to service "Works-in-a-drawer", may be removed by unplugging one electrical connection.



Optional pedestal allows the L-1X16 to be raised up to a full 12" off the floor for easy operator use. Height adjustable from 8" to 12".

WARNING: Electrical and plumbing connections need to be made by a qualified service person who will comply with all available Federal, State, and Local Health, Electrical, Plumbing and Safety codes.

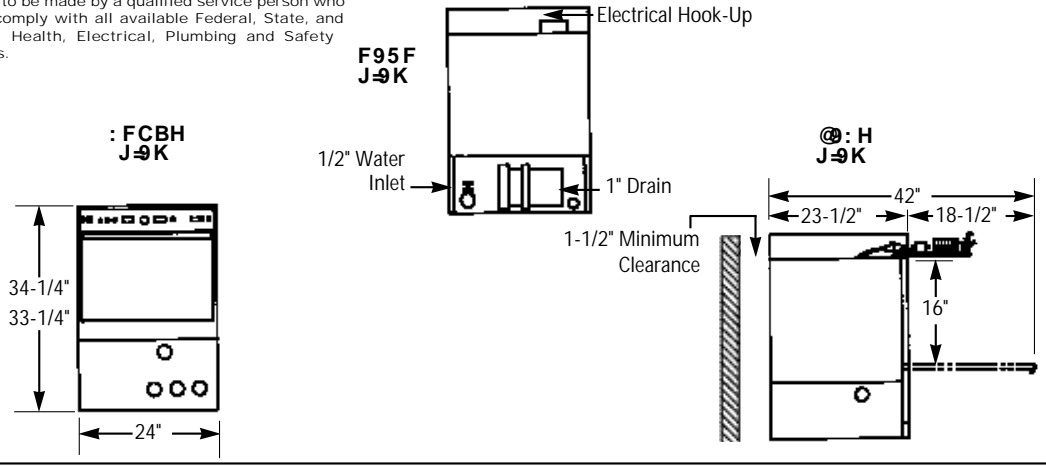

GdYVZVUJcgbg.

| | I G5 | A9HF7 | I G5 | A9HF7 |
|---|----------------------|-----------------------|-----------------|------------|
| OPERATING CAPACITY RACKS PER HOUR (NSF RATED) | 24 | 24 | | |
| OPERATING CYCLE WASH TIME-SEC | 57 | 57 | | |
| RINSE TIME-SEC | 48 | 48 | | |
| DWELL/PURGE-SEC | 15 | 15 | | |
| TOTAL CYCLE TIME | 120 | 120 | | |
| WASH TANK CAPACITY | 1.7 GAL. | (6.43 L) | | |
| WASH PUMP CAPACITY | 35 GPM | (132 LPM) | | |
| OPERATING TEMPERATURE REQUIRED | 120°F | (49°C) | | |
| RECOMMENDED | 140°F | (60°C) | | |
| WATER CONSUMPTION PER RACK PER HOUR | 1.7 GAL. 40.8 GPH | (6.43 L) (154 LPH) | | |
| WATER INLET | 1/2" | - | | |
| DRAIN | 1" | - | | |
| WASH PUMP MOTORS HP | | | 1 | 1 |
| DIMENSIONS | | | | |
| DEPTH | | | 23-1/2" | (59cm) |
| WIDTH | | | 24" | (61cm) |
| HEIGHT | | | 33-1/4"-34-1/4" | (84-86 cm) |
| MAXIMUM CLEARANCE | | | | |
| HEIGHT FOR DISHES | | | 16" | (40.64cm) |
| STANDARD DISHRACK | | | 1 | 1 |
| DIMENSIONS | | | 19-3/4"X19-3/4" | (50X50cm) |
| ELECTRICAL RATING | | | VOLTS | AMPS |
| | | | 115 | 16 |
| SHIPPING WEIGHT | | | | |
| APPROXIMATE | | | 196# | (88kg) |

Gi a a UfmGdYVZVUJcgbg. AcXY'@%L%

OT (ED) ... (The following text is a dense block of garbled characters, likely a corrupted or placeholder version of a technical note or warning.)

5j UjUVYCdHcgbg

- U' ...
- U ...
- OT ...
- U ...
- U ...
- I ...
- O ...